


# Longitudinal scraper



Sketch: Longitudinal scraper with bottom and floating sludge blades

# Longitudinal scraper

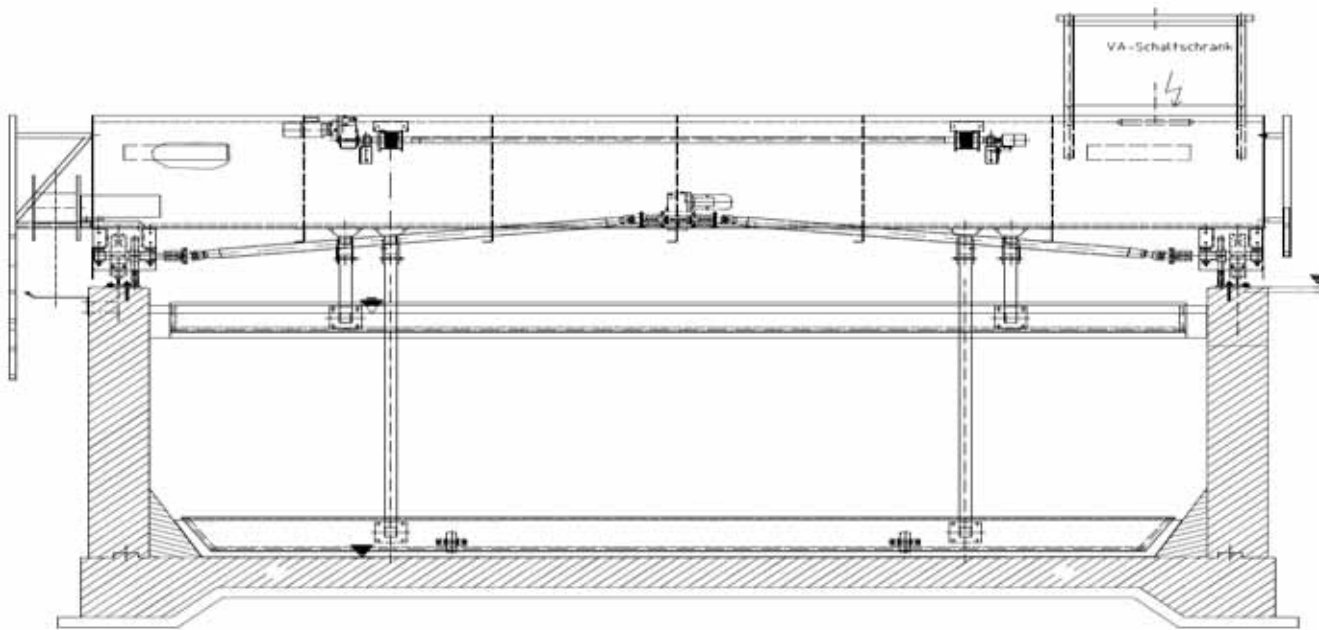

## performance

variants:	longitudinal scraper double longitudinal scraper triple longitudinal scraper
scraper bridge:	full-wall construction half-wall construction with attached railings truss bridge (open and closed form) bridge profiled carriers
clearing speed:	one-/ double, frequency-control system
power unit:	peripheral drive, central drive, wheel and rake driven
wheels:	rubber tires, tires of PU or rail wheels
treadment:	blade and suction scraping
medium:	ground sludge floating sludge
winter protection :	rail and rack roadway heating travelway de-icer snow clearer hotair blower

## main dimensions

track width:	up to 40 m
basin length:	up to 70 m
basin depth:	up to 8m

## material

above-water parts:  
hot-dipped galvanized steel, hot dip galvanized steel with coating, SS AISI 316 or SS AISI 304, dip-pickled and passivated, and other material

under-water parts:  
SS AISI 316 or SS AISI 304, dip-pickled and passivated, and other material

**AWT Umwelttechnik**  
Eisleben GmbH

Querfurter Straße 7  
06295 Lutherstadt Eisleben

Tel.: +49 (0) 34 75 / 63 36 - 0  
Fax: +49 (0) 34 75 / 63 36 - 10  
E-Mail: [info@awt-eisleben.de](mailto:info@awt-eisleben.de)  
Web: [www.awt-eisleben.de](http://www.awt-eisleben.de)