


grit & grease longitudinal scraper



Sketch: Double grit & grease longitudinal scraper with grit pump and fat scraper.

grit & grease longitudinal scraper

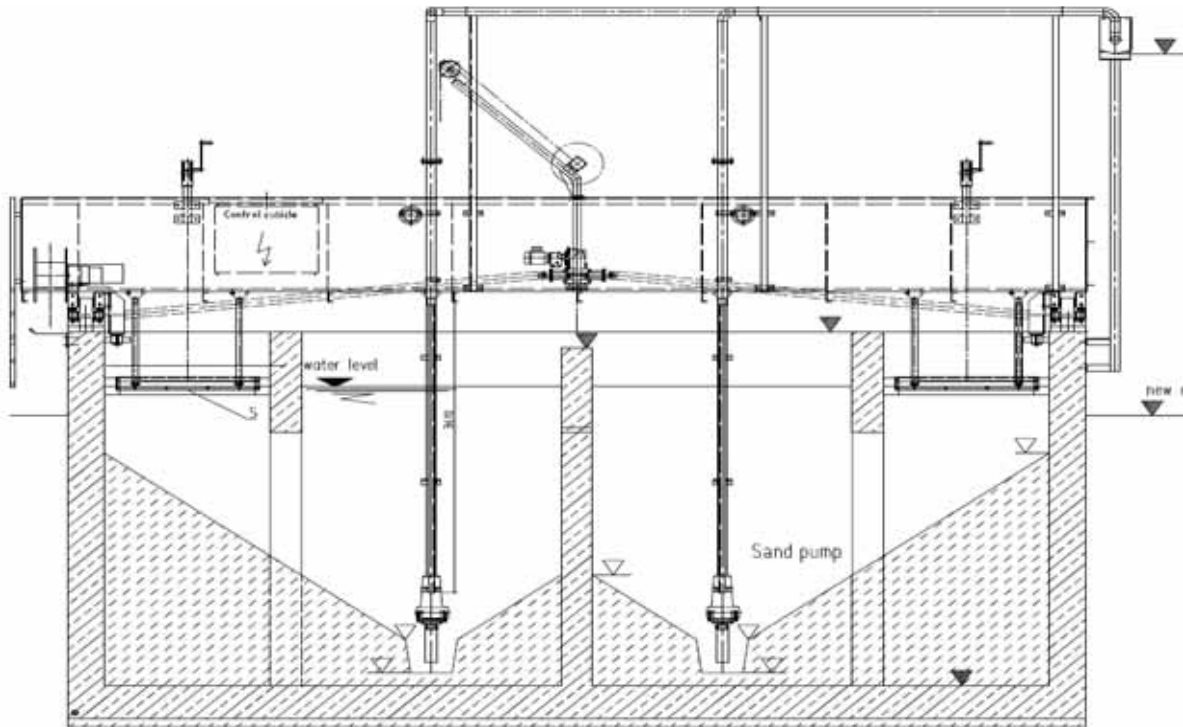

Performance

- variants: grit and grease longitudinal scraper
double grit and grease longitudinal scraper
triple grit and grease longitudinal scraper
- scraper bridge: full-wall construction
half-wall construction with attached railings
truss bridge (open and closed form)
bridge profiled carriers
- clearing speed: fixed or frequency controlled
- power unit: peripheral drive, central drive, wheel drive or rake drive
- wheels: rubber tires, PU-wheels or rail wheels
- treadment: grit and grease blade or grit pump
- medium: grease
grit
- winter protection: rail and rack
roadway heating
travelway de-icer
snow clearer
hotair blower

main dimensions

- track width: up to 12 m
basin length: up to 50 m
grit chamber depth: up to 5 m

material

above-water parts:
hot-dip galvanized steel, hot dip galvanized steel with coating, SS AISI 316 or SS AISI 304, dip-pickled and passivated, and other material

under-water parts: SS AISI 316 or SS AISI 304, dip-pickled and passivated, and other material

AWT Umwelttechnik
Eisleben GmbH

Querfurter Straße 7
06295 Lutherstadt Eisleben

Tel.: +49 (0) 34 75 / 63 36 - 0
Fax: +49 (0) 34 75 / 63 36 - 10
E-Mail: info@awt-eisleben.de
Web: www.awt-eisleben.de